



HARDENED & GROUND CHROME PLATED SHAFT

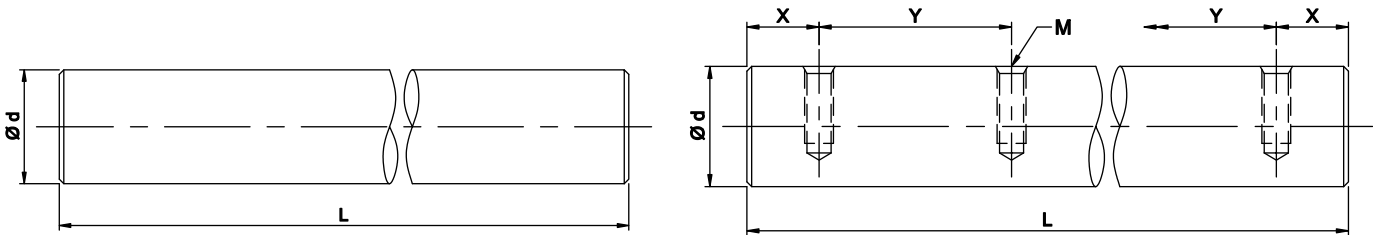

Model No.	Diameter	Tolerance 0.001 mm		Max Length	Depth of effective Hardness layer tolerance ± 0.05	Weight
		g6	h6			kg/m
S	d					
S 8	8	-5	0	4000	1.0	0.4
S 10	10	-14	-9			0.62
S 12	12	-6	0			0.89
S 13	13	-17	-11			1.05
S 16	16					1.58
S 20	20	-7	0			2.47
S 25	25	-20	-13	6000	2.0	3.85
S 30	30					5.55
S 35	35	-9	0			7.55
S 40	40	-25	-16			9.87
S 50	50					15.41
S 60	60	-10	0			22.20
S 80	80	-29	-19		2.8	39.46

Model No.	Diameter	Tolerance 0.001 mm		Depth effective hardness layer tolerance ± 0.5	L Max	x	y	M
		g6	h6					
T S 16	16	-6	0	1.0	6000	75	150	M5
T S 20	20	-17	-11	1.2				M6
T S 25	25	-7	0	1.8				M8
T S 30	30	-20	-13	2.0				M10
T S 40	40	-9	0	2.2				M12
T S 50	50	-25	-16	2.4				
T S 60	60	-10	0	2.8				
		-29	-19					

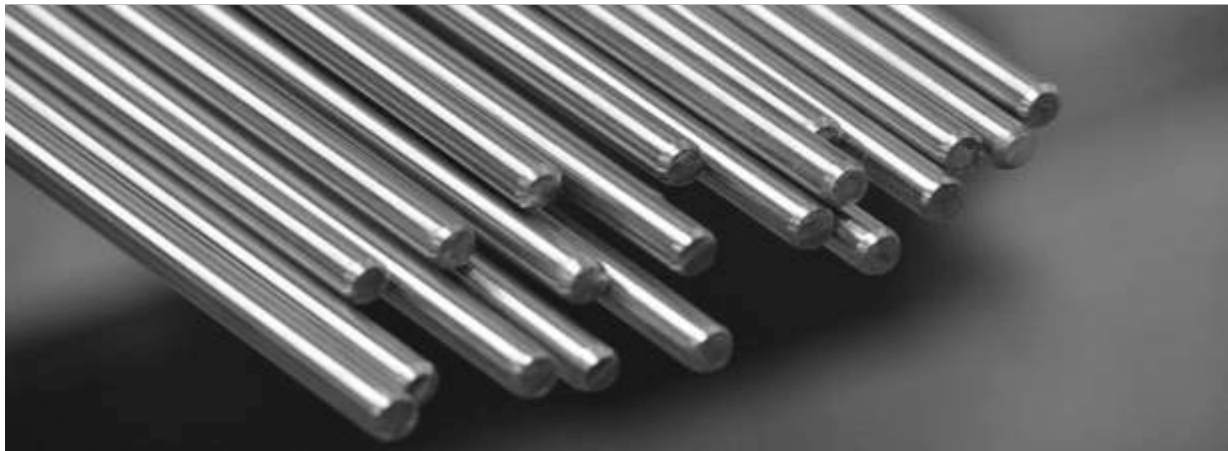